

## SERIES GSA SWD POWER SUPPLY (Single Phase) 24 VOLT DC OUTPUT

**DIN RAIL MOUNT**                      1.25 Amp to 20 Amp  
**COMPACT SIZE**                        30 Watt to 480 Watt  
**REGULATED OUTPUT**



### FEATURES

Single phase input  
Wide Input Range 100-240 VAC





### SPECIFICATIONS

Input Voltage	100 - 240 VAC
Frequency	47 - 63 Hz
Output voltage	Select: 24 VDC
Output voltage adj.	-5 +15%
Temperature rating	-10°C + 50°C
Approvals	01, 02 - UL1950, UL508 Listed, Class 2 05, 10, 20 - UL508 Listed
Protection	Internal Fuse T2A / 250VAC
Connection	01, 02 Quick Connect Terminals 05, 10, 20 Screw Clamp Terminal

Selection	GSA SWD 01	GSA SWD 02	GSA SWD 05	GSA SWD 10	GSA SWD 20
Catalog Number	D 0023 01	D 0023 02	D 0023 05	D 0023 10	D 0023 20
List Each	\$65	\$70	\$110	\$150	\$305
Output Voltage	<u>24VDC</u>	<u>24VDC</u>	<u>24VDC</u>	<u>24VDC</u>	<u>24VDC</u>
Output Current	1.25A	2.5A	5A	10A	20A
Noise in mV	50	50	50	100	100
Dimensions approx. mm Inch	H    W    D 90    40    115 (3.5") (1.6") (4.5")	H    W    D 90    40    115 (3.5") (1.6") (4.5")	H    W    D 125   63   126 (4.9") (2.5") (5.0")	H    W    D 125   83   126 (4.9") (3.3") (5.0")	H    W    D 125   175   116 (4.9") (6.9") (4.6")



**Din  
Rail Mount**

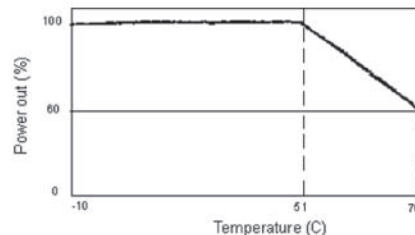

Discount Schedule: DE

## SERIES GSA SWD POWER SUPPLY (Single Phase) 5,12 & 48 VOLT DC OUTPUT

**DIN RAIL MOUNT  
COMPACT SIZE  
REGULATED OUTPUT**

**5 & 10 Amp**



### FEATURES

Single phase input  
Wide Input Range 100-240VAC




### SPECIFICATIONS

Input Voltage	100 - 240 VAC
Frequency	47 - 63 Hz
Output voltage	Select: 5VDC, 12VDC, 48VDC
Temperature rating	-10° + 50°C
Approvals	02-UL1950, UL508 listed, Class 2, 05, 10, 20 - UL 508 Listed
Protection Type	Internal Fuse T2A / 250 VAC
Connection	02-Quick Connect Terminals, 05,10 ,20 -Screw Clamp Terminals

Selection	GSA SWD 02/5			GSA SWD 02/12			GSA SWD 5/12			GSA SWD 10/48			GSA SWD 20/48		
Catalog Number	D 0023 50			D 0023 51			D 0023 06			D 0023 18			D 0023 28		
List Each	\$80.00			\$80.00			\$120.00			\$180.00			\$300.00		
Output Voltage	5VDC			12VDC			12VDC			48VDC			48VDC		
Output Current	10 A			5A			10A			5A			10A		
Noise in mV	50			50			100			100			100		
Dimensions approx. mm (Inch)	H	W	D	H	W	D	H	W	D	H	W	D	H	W	D
	90 (3.5")	40 (1.6")	115 (4.5")	125 (4.9")	63 (2.5")	126 (5.0")	125 (4.9")	83 (3.3")	126 (5.0")	125 (4.9")	175 (6.9")	116 (4.6")			



**Din Rail Mount  
SWD**



**Dimensions  
Approx.**

Discount Schedule: DE