


## R-Series Pushbuttons, Selector Switches



### LED Pilot Light's Modular 22mm + 30mm

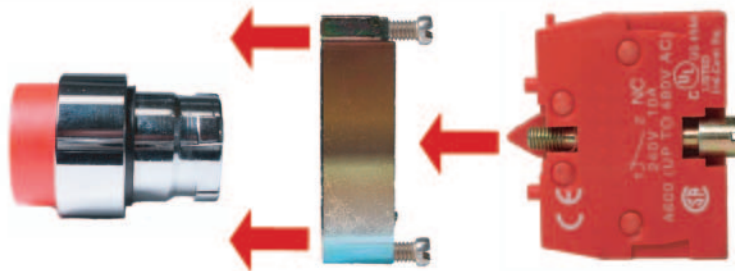

Metal  
Chrome  
Bezel

Steel Block Holder  
Included with operators

Bolt - On  
Contact  
Block

**A Secure + Safe System Versus Snap on Contacts**



## Pushbuttons

22 mm, NEMA 4, IP65



IEC 947-1


-13°, + 158°F Ambient Temp

Pushbuttons and Selectors  
1 million mechanical Oper.  
Emergency Stop  
300,000 Operations

10 Amp, 600 Volt  
A600, Q600

## FEATURES

- High Gloss Chrome
  - Rugged Design
  - Very Bright LED's (22 & 30mm)
  - Modular Design
  - Secure Screw Mounting
  - Self Cleaning Contacts
  - Stackable Contacts
  - Positive Open Contacts (→)
- Per IEC - 609 47 - Parts

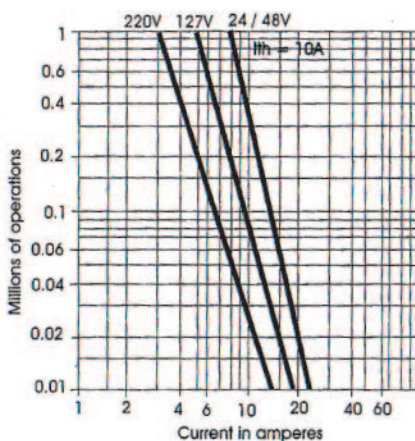

AC Ratings, Inductive - NEMA A600  
35% Power Factor

Volts	Make Amperes	VA	Break Amperes	VA	Continuous carrying Amperes	Resistive 75% Power factor Make, Break & continuous Amperes
120	60	7200	6	720	10	10
240	30	7200	3	720	10	10
480	15	7200	1.5	720	10	10
600	12	7200	1.2	720	10	10

DC Ratings, UL Type Q600  
Inductive and resistive Amps

Volts	Amps Make & Break	Amps Continuous
125	0.55	2.5
250	0.27	2.5
600	0.10	2.5

Minimum AC/DC 17 Volts, 25mA

Pushbutton  
Dimensions

